

POLYFLOR™
COVERING THE WORLD

1160 SMOKESTONE

Classic Mystique PUR

POLYFLOR
PUR
POLISH FREE



Classic Mystique PUR

Classic Mystique PUR retains the uncomplicated, clean architectural feel of subtle neutrals, but now with added warmer tones for a perfectly balanced combination.

Available in 16 harmonious colours, Classic Mystique PUR has a tonal non-directional appearance, featuring a duotone chip decoration with marbled tonal highlight chips.

As with all Homogeneous PUR ranges, Classic Mystique PUR features a high quality, cross-linked polyurethane reinforcement, UV cured to provide a low-cost polishfree maintenance regime for the lifetime of the flooring.

Polyflor Homogeneous PUR ranges demonstrate outstanding durability and abrasion resistance. Classic Mystique PUR achieves the abrasion wear rating EN ISO 10581 Type I, demonstrating excellent resilience and long life.

Following an individual assessment from BRE Global, Classic Mystique PUR achieves an A+ rating in major sectors such as health, education and retail (ENP 472).

Classic Mystique PUR is 100% recyclable and contains 25% recycled material.

Ideally suited for heavy traffic areas, Classic Mystique PUR is recommended for use throughout commercial interiors, healthcare and education facilities, as well as retail outlets.

Classic Mystique PUR

Duotone chip decoration with
marbleised tonal highlight chips

KEY FEATURES

- Attractive, high performance, heavy duty homogeneous floorcovering.
- BRE Global environment A+ rating (Certificate No ENP 472).
- Achieves abrasion wear rating EN ISO 10581 Type I.
- Polyurethane reinforcement to facilitate a low-cost, lifetime polish-free maintenance regime.
- Sophisticated non-directional decoration with duotone base chips and marbleised tonal highlight chips available in both sheet and tile.
- Use Area Classification 23/34/43 as defined in EN 685.



1380 NOCTURNE



Classic Mystique PUR

2 x 20m = 40m²



1200 PALE SLATE
NCS S 3502-B

W/R 1200
LRV 47



1400 QUARTZ
NCS S 2500-N



W/R 9340
LRV 50



1400 QUARTZ

Classic Mystique PUR

 2 x 20m = 40m²

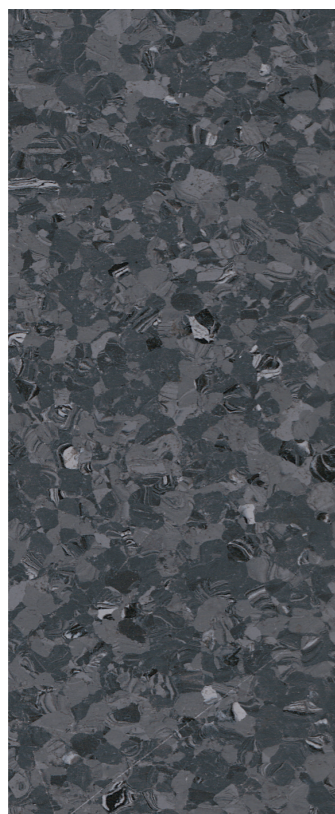
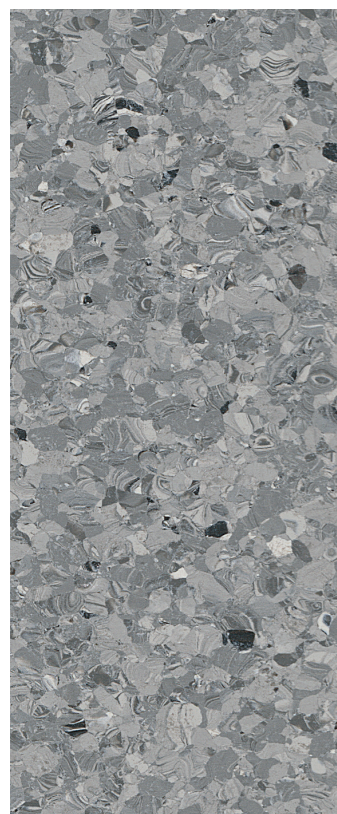



1160 SMOKESTONE
NCS S 4502-G

W/R 9120
LRV 28

1380 NOCTURNE
NCS S 6502-B

W/R 8270
LRV 13




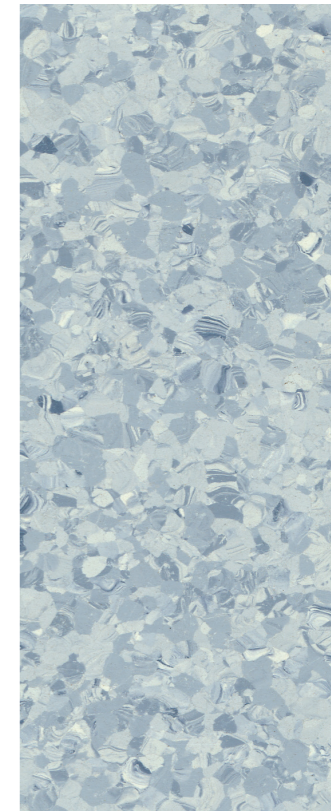
 1380 NOCTURNE



□ 1260 SUNBLAZE

Classic Mystique PUR

 2 x 20m = 40m²





1410 LADOGA
NCS S 2010-R90B

W/R 1410
LRV 46





1260 SUNBLAZE
NCS S 3060-Y90R

W/R 1260
LRV 14

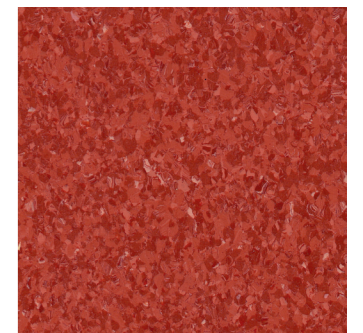

Classic Mystique PUR

 2 x 20m = 40m²

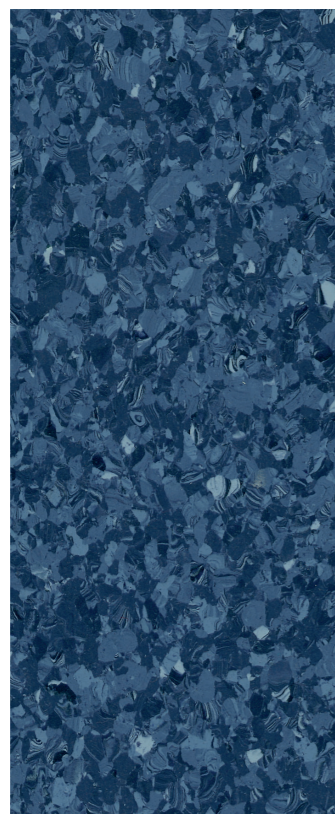
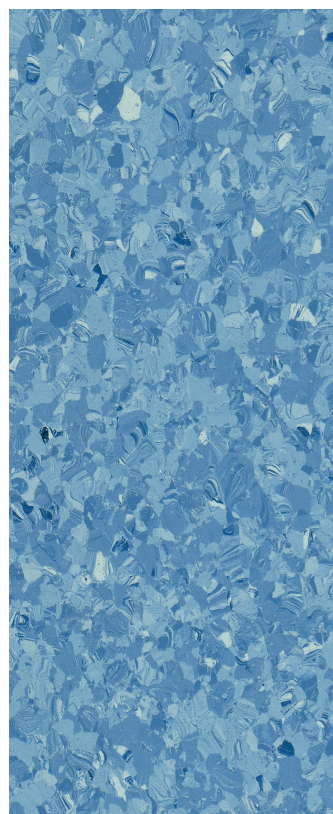



1210 CLOUDBURST
NCS S 2040-R90B

W/R 1210
LRV 32

1220 DELTA BLUE
NCS S 6020-R80B

W/R 1220
LRV 11



 **1220 DELTA BLUE**



□ 1330 MOUNTAIN LAKE

Classic Mystique PUR



📐 2 x 20m = 40m²




1330 MOUNTAIN LAKE W/R 8350
NCS S 3020-R90B LRV 28





1550 STEEL PARADE W/R 1550
NCS S 3500-N LRV 36

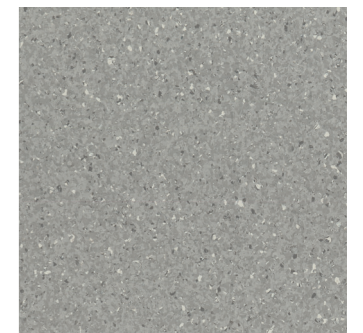


Classic Mystique PUR

 2 x 20m = 40m²

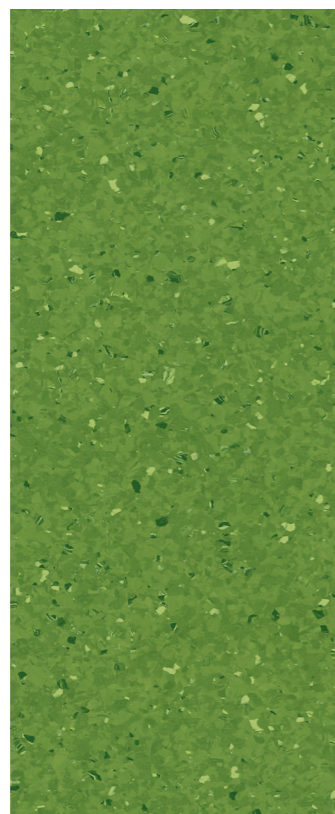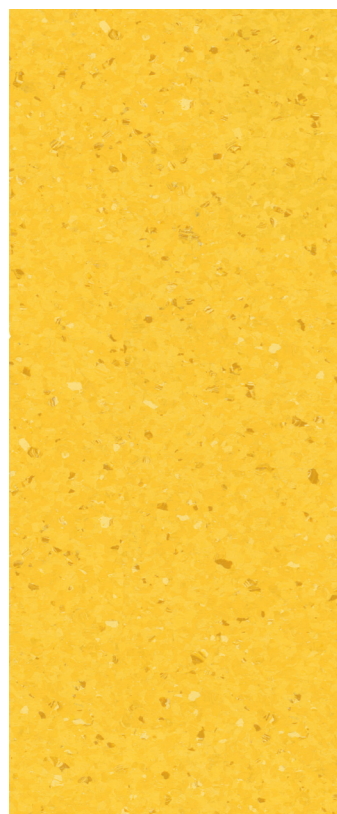

1140 LEMON ZEST W/R 1140
NCS S 1060-Y10R LRV 58

1150 SPRING MEADOW W/R 1150
NCS S 3050-G40Y LRV 22




 1150 SPRING MEADOW



□ 1430 SILVER MIST

Classic Mystique PUR

📏 2 x 20m = 40m²

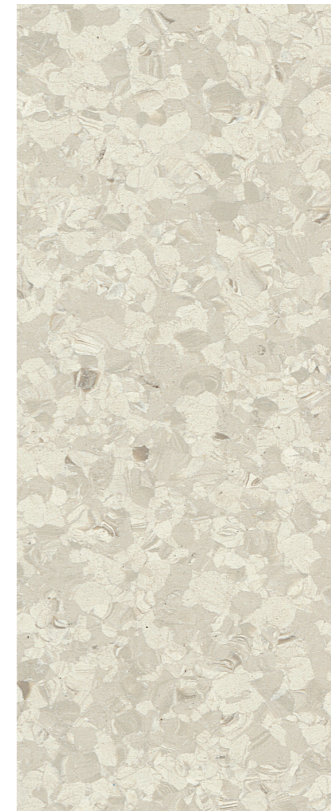

1430 SILVER MIST
NCS S 1505-Y40R

W/R 1430
LRV 62




1370 SATINWOOD
NCS S 1505-Y30R

W/R 8320
LRV 55



Classic Mystique PUR

2 x 20m = 40m²

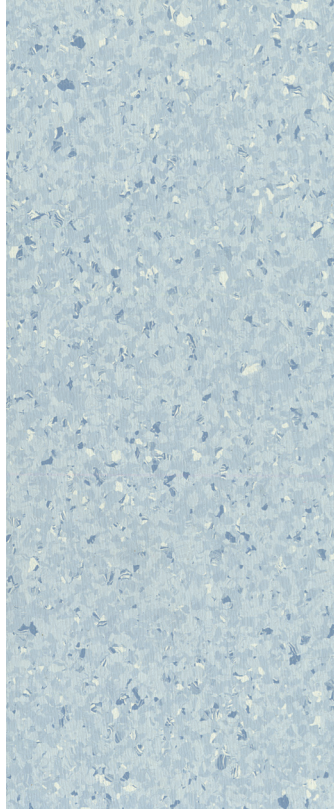


1590 ATLANTIC SURF
NCS S 1510-R80B

W/R 1590
LRV 58

1560 SOFT ALMOND
NCS S 1505-Y40R


W/R 1560
LRV 64



1590 ATLANTIC SURF



Classic Mystique PUR


 2 x 20m = 40m²



1460 SHORELINE W/R 8320
NCS S 1505-Y30R LRV 55




1540 SILENT DOVE W/R 1540
NCS S 1002-Y LRV 66

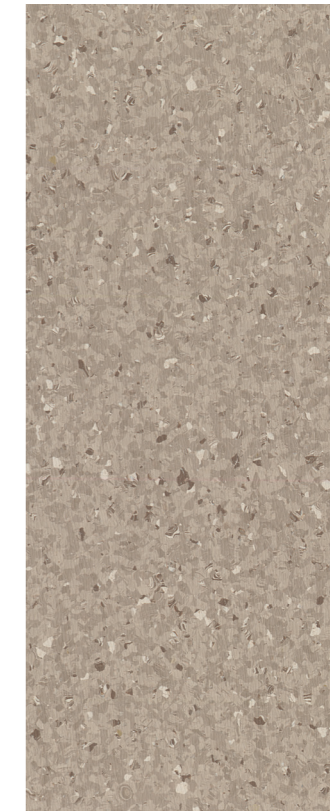

1570 NUT HUSK W/R 1570
NCS S 3005-Y50R LRV 38




1320 ASPARAGUS W/R 8360
NCS S 3010-G50Y LRV 37

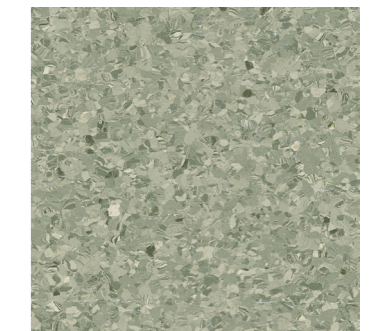


Classic Mystique PUR


📏 2 x 20m = 40m²

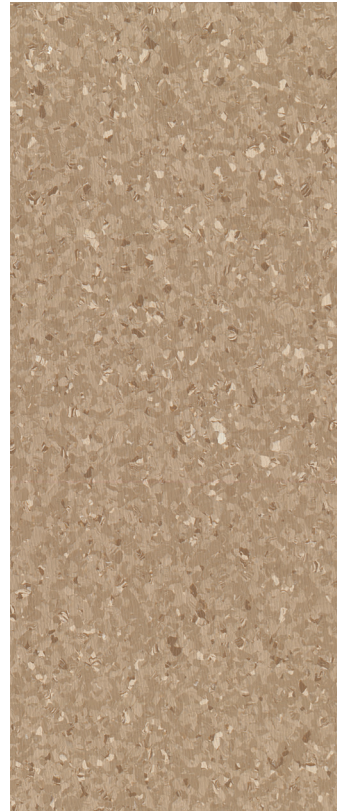


1580 SORREL BAY W/R 1580 LRV 36
NCS S 3010-Y30R

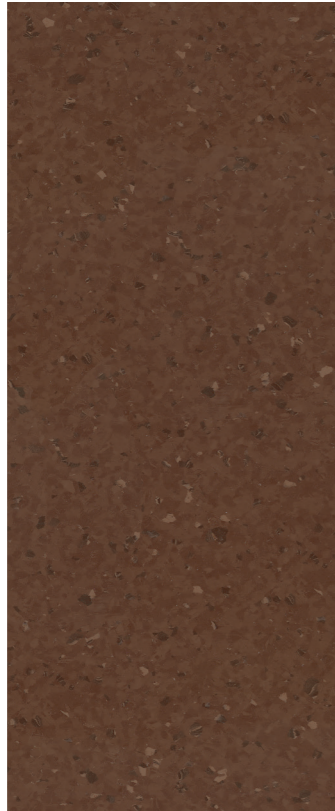



1520 RICH CHOCOLATE W/R 1520 LRV 10
NCS S 7010-Y50R

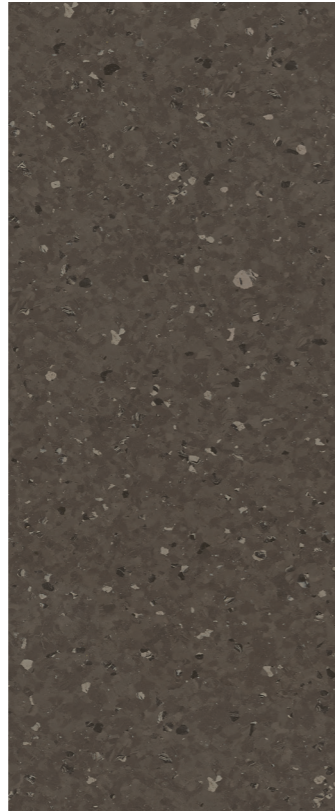

1190 SMOKED TRUFFLE W/R 1190 LRV 612
NCS S 7005-Y20R

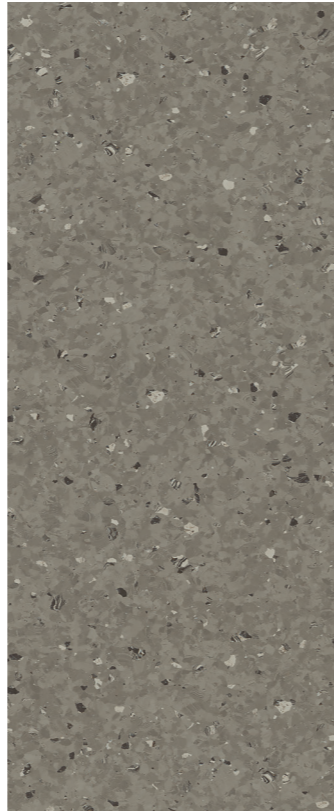

1530 CLOUD STONE W/R 1530 LRV 25
NCS S 4502-Y



□ 1520 RICH CHOCOLATE

Classic Mystique PUR

TECHNICAL SPECIFICATIONS

Classic Mystique PUR

PRODUCT FORMAT	Standard	Result
Gauge	ISO 24346 (EN 428)	2.0mm
Total Weight	ISO 23997 (EN 430)	3250g/m ²
Finish		PUR

SHEET SIZE	Size	Shades	Quantity per Box	Coverage per Box/Roll
Sheet	2m x 20m	24		40m ²

PERFORMANCE REQUIREMENTS	Standard	Result
General Performance	ISO 10581 ASTM F1913 ASTM F1700	Conforms Conforms Class I, Type A
Use Area	ISO 10874 (EN 685)	23, 34, 43
Slip Resistance	EN 13893 DIN 51130 / DIN EN 16165 Ann. B AS 4586 Appendix D ASTM D2047	Class DS R9 R10 SCOF ≥0.6
Binder Content	ISO 10581	Type I
Reaction to Fire	EN 13501-1 ASTM E662 ASTM E648 AS ISO 9239.1 CAN/ULC S102.2	Class Bfl-S1 <450 Class 1 ≥ 8kW/m ² FSV < 300; SDV < 500
Static Electrical Propensity	EN 1815	≤2.0kV Classified as 'antistatic'
Residual Indentation	ISO 24343-1 (EN 433) ASTM F970 (Modified)	≤0.10mm ≤0.005" @ 750psi
Castor Chair (continuous use)	ISO 4918 (EN 425)	Suitable
Flexibility	ASTM F137	Pass
Underfloor Heating		Suitable, max 27°C
Light Fastness	ISO 105-B02 (Method 3)	≥6
Resistance to Light	ASTM F1515	ΔE ≤ 8.0 - Meets
Resistance to Heat	ASTM F1514	ΔE ≤ 8.0 - Meets

SUSTAINABILITY	Standard	Result
BRE Green Guide		A+ ENP 472
GreenTag		GreenRate Level A, LCA Rate Gold Plus
Generic EN 15804 EPD		Available
Recyclable		100%
Recycled Content		25%
REACH		Compliant
Indoor Air Comfort Gold		Eurofins certified product
FloorScore		Certified
Finnish M1 Classification		Certified
AgBB/ABG		Pass
VOC Emissions	TVOC after 28 days	≤ 10µg/m ³
Responsible Sourcing	BES 6001	Excellent

ACOUSTIC PERFORMANCE	Standard	Result
Impact Sound Reduction	ISO 10140-3	4dB

MAINTENANCE PERFORMANCE	Standard	Result
Resistance to Chemicals	ISO 26987 (EN 423) ASTM F925	Good resistance Good resistance
Alco Hand Gels		Compatible for use with most commonly used alco-based hand gels.
Steam Cleaning		Suitable for steam cleaning on a periodic basis.

All Polyflor commercial sheet vinyl ranges provide a continuous, impervious and hygienic flooring solution which can be confidently cleaned in accordance with recommended maintenance procedures and approved maintenance products. The implementation of an effective cleaning regime is the most important defence against infection. Regular light maintenance is more cost-effective than periodic heavy maintenance and more beneficial to the floor covering.

HYGIENE	Standard	Result
Bacterial Resistance	ISO 846 Part C	Does not favour growth
Ease of Radioactive Decontamination	ISO 8690	Excellent



Classic Mystique PUR


RANGE SHADES - 25 SHADES

Classic Mystique PUR


Sheet Size : 2 x 20m




1140 LEMON ZEST W/R 1140
NCS S 1060-Y10R LRV 58




1150 SPRING MEADOW W/R 1150
NCS S 3050-G40Y LRV 22




1160 SMOKESTONE W/R 9120
NCS S 4502-G LRV 28




1190 SMOKED TRUFFLE W/R 1190
NCS S 7005-Y20R LRV 612




1200 PALE SLATE W/R 1200
NCS S 3502-B LRV 47




1210 CLOUDBURST W/R 1210
NCS S 2040-R90B LRV 32




1220 DELTA BLUE W/R 1220
NCS S 6020-R80B LRV 11



1260 SUNBLAZE W/R 1260
NCS S 3060-Y90R LRV 14




1320 ASPARAGUS W/R 8360
NCS S 3010-G50Y LRV 37



1330 MOUNTAIN LAKE W/R 8350
NCS S 3020-R90B LRV 28



1370 SATINWOOD W/R 8320
NCS S 1505-Y30R LRV 55




1380 NOCTURNE W/R 8270
NCS S 6502-B LRV 13

Sheet Size : 2 x 20m



1400 QUARTZ W/R 9340
NCS S 2500-N LRV 50



1410 LADOGA W/R 1410
NCS S 2010-R90B LRV 46



1430 SILVER MIST W/R 1430
NCS S 1505-Y40R LRV 62



1460 SHORELINE W/R 8320
NCS S 1505-Y30R LRV 55



1520 RICH CHOCOLATE W/R 1520
NCS S 7010-Y50R LRV 10



1530 CLOUD STONE W/R 1530
NCS S 4502-Y LRV 25



1540 SILENT DOVE W/R 1540
NCS S 1002-Y LRV 66



1550 STEEL PARADE W/R 1550
NCS S 3500-N LRV 36




1560 SOFT ALMOND W/R 1560
NCS S 1505-Y40R LRV 64



1570 NUT HUSK W/R 1570
NCS S 3005-Y50R LRV 38



1580 SORREL BAY W/R 1580
NCS S 3010-Y30R LRV 36



1590 ATLANTIC SURF W/R 1590
NCS S 1510-R80B LRV 58

POLYFLOR INDONESIA

Jl. Jendral Sudirman Kav. 29-31 WTC5, RT.8/RW.3
Kuningan, Karet, Jakarta, South Jakarta City, Jakarta 12920, Indonesia
T: +62 818-0565-0101 / +62 817-897-169
www.polyflor.co.id

POLYFLOR MALAYSIA

Lot 2D, Jalan Kilang 51/215, Section 51,
46050 Petaling Jaya, Selangor Darul Ehsan, Malaysia.
T: 1300 80 7788
E: sales@polyflor.com.my
www.polyflor.com.my

POLYFLOR PHILIPPINES

E: sales@polyflor.com.my
www.polyflor.com.my

POLYFLOR SINGAPORE

T: +65-87908408
E: sales@polyflor.com.my

POLYFLOR THAILAND

Bhiraj Tower at EmQuartier Building
30th Floor, Room No. 3087, Watthana, Bangkok 10110, Thailand
T: +603 - 7770 0990
www.polyflorthailand.com

POLYFLOR VIETNAM

6F & 7F, Me Linh Point Tower 2, Ngo Due Ke,
District 1, Ho Chi Minh City, Vietnam
T: +84 39 9240177 / +84 96 721 8151
E: info@polyflor.com.vn / sales@polyflor.com.my
www.polyflor.co.vn

